

LED Strip Series

Series	Technical Specification	Page
LEDStrip Mini 	60pcs 3014 Lumileds LED per meter, creating 4.8W to 13.2W per meter power package in 24V; IP65 water proof silicon sleeve version available.	02
LEDStrip 	120pcs 3014 Lumileds LED per meter, creating 4.8W to 13.2W per meter power package in 24V; IP65 water proof silicon sleeve version available.	04
LEDStrip Duo 	360pcs 3014 Lumileds LED per meter in two parallel line, creating 9.6W to 19.2W per meter power package in 24V; IP65 water proof silicon sleeve version available.	06
LEDStrip Dual 	2700K to 4000K color temperature change LED strip; total 120pcs 3014 Lumileds LED per meter; maximum limited to 13.2W per meter power package in 24V; IP65 water proof silicon sleeve version available.	08
LED Vertical Strip 	Vertical bending LED Strip; 120pcs LED per meter, creating 9.6W per meter power package in 24V; IP65 water proof silicon sleeve version available.	10
RGB LED Strip 	60pcs RGB LED per meter, creating 14.4W per meter power package in 24V; IP65 water proof silicon sleeve version available.	12
RGBW LED Strip 	60pcs RGBW LED per meter, creating 19.2W per meter power package in 24V; IP65 water proof silicon sleeve version available.	14

LED Strip in Profile Series

Series	Technical Specification	Page
LEDStrip S Pro 	7mm thick aluminium profile, matching with LEDStrip or LEDStrip Mini, Polycarbonate diffuser for soft lighting effect	16
LEDStrip Pro 	13mm thick aluminium profile, matching with LEDStrip or LEDStrip Mini, Polycarbonate diffuser for soft lighting effect	18
LEDStrip L Pro 	3-side light emission aluminium profile, matching with LEDStrip or LEDStrip Mini, Polycarbonate diffuser for soft lighting effect	20
LEDStrip Stick 	10mm width aluminium profile, matching with LEDStrip or LEDStrip Mini, Polycarbonate diffuser for soft lighting effect	22
LEDStrip Pro Corner 	Corner installation aluminium profile, matching with LEDStrip or LEDStrip Mini, Polycarbonate diffuser for soft lighting effect	24



LEDStrip Mini


- Easy to bend for flexible design
- Can be shorten by every 100mm
- CRI Typical 82 and 90 options
- 3M adhesive in the Flexible Strip
- Come with mounting clip for IP Flexible Strip
- IP65 water proof silicon sleeve in IP version
- Seperate order of power supply is available
- SDCM Step 3, high color temperature stability

Standard Version

MX 6356 - [] - [] K - 24V - 1000(x3)

Code	W	Code	CRI	Code	CCT
4.8	4.8W/m	8	80	25	2500K
6.6	6.6W/m	9	90	27	2700K
9.6	9.6W/m			30	3000K
13.2	13.2W/m			35	3500K
				40	4000K

- 3000mm, 24V DC, CRI80, 60pcs LEDs/m 13.2W/m, 3780lm
- 3000mm, 24V DC, CRI90, 60pcs LEDs/m 13.2W/m, 2762lm
- *2500K only with CRI80*





IP65 Version



MX 6357- [] - [] K - 24V - 1000(x3)

Code	W	Code	CRI	Code	CCT
4.8	4.8W	8	80	25	2500K
6.6	6.6W	9	90	27	2700K
9.6	9.6W			30	3000K
13.2	13.2W			35	3500K
				40	4000K

- 3000mm, 24V DC, CRI80, 60pcs LEDs/m 13.2W/m, 3780lm
- 3000mm, 24V DC, CRI90, 60pcs LEDs/m 13.2W/m, 2762lm
- *2500K only with CRI80*

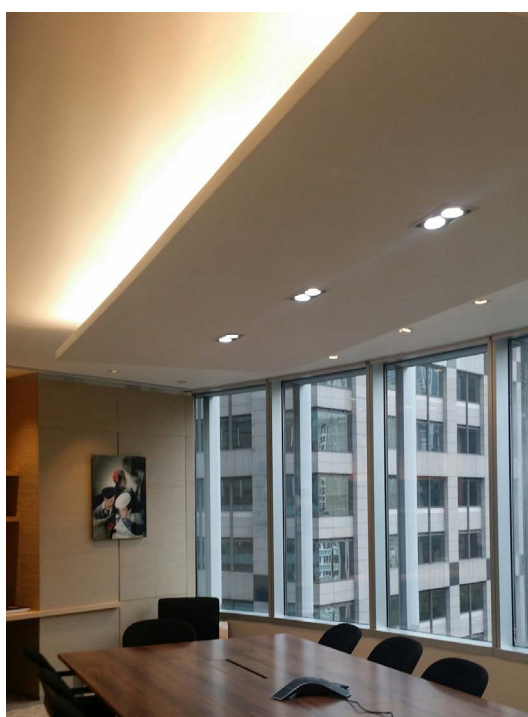


1:1 Scale

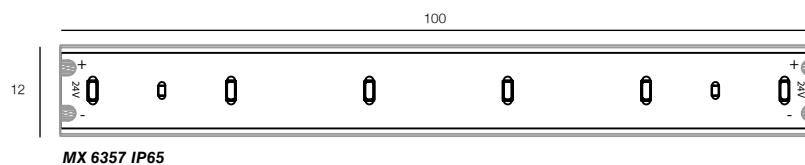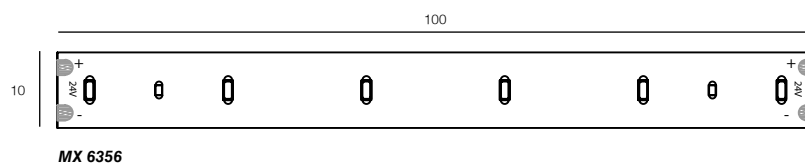

Connection Detail


Maximum 5 meters in LINEAR CONNECTION

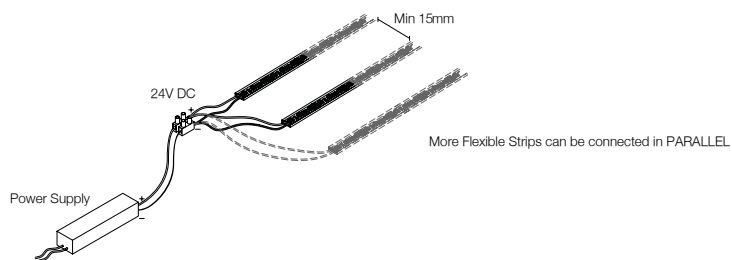

Accessory

[LEDStrip Clip](#)

MX 6355 - L20



LED Driver

Ordering Code	<i>EC LED-24V-120-PH(24)</i>	<i>EC LED-24V-75D-LH(22)</i>
Maximum Driving Power	96W	60W
Matching with LED Fitting	3014 LED Strip	
Output Current	24V DC	24V DC, 1-10V Dimmable
Wiring Box Dimension(mm) (L) x (W) x (H)	350 x 100 x 40	300 x 108 x 60
Cut Hole (mm)	Ø110	Ø124



LEDStrip


- Easy to bend for flexible design
- Can be shorten by every 50mm
- CRI Typical 82 and 90 options
- 3M adhesive in the Flexible Strip
- Come with mounting clip for IP Flexible Strip
- IP65 water proof silicon sleeve in IP version
- Seperate order of power supply is available
- SDCM Step 3, high color temperature stability

Standard Version

MX 6358 - - **K - 24V - 1000(x3)**

Code	W	Code	CRI	Code	CCT
4.8	4.8W/m	8	80	25	2500K
6.6	6.6W/m	9	90	27	2700K
9.6	9.6W/m			30	3000K
13.2	13.2W/m			35	3500K
				40	4000K

- 3000mm, 24V DC, CRI80, 120pcs LEDs/m 13.2W/m, 3780lm
- 3000mm, 24V DC, CRI90, 120pcs LEDs/m 13.2W/m, 2762lm
- *2500K only with CRI80




IP65 Version


MX 6359 - - **K - 24V - 1000(x3)**

Code	W	Code	CRI	Code	CCT
4.8	4.8W/m	8	80	25	2500K
6.6	6.6W/m	9	90	27	2700K
9.6	9.6W/m			30	3000K
13.2	13.2W/m			35	3500K
				40	4000K


- 3000mm, 24V DC, CRI80, 120pcs LEDs/m 13.2W/m, 3780lm
- 3000mm, 24V DC, CRI90, 120pcs LEDs/m 13.2W/m, 2762lm
- *2500K only with CRI80



1:1 Scale

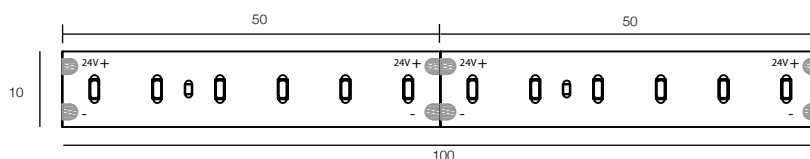


MX 6358

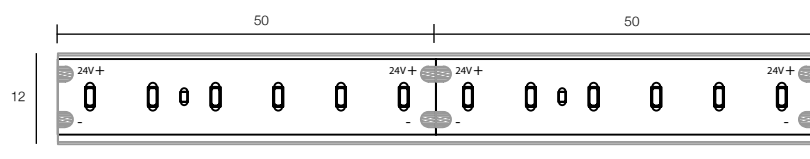

MX 6359 IP65

Connection Detail


Maximum 5 meters in LINEAR CONNECTION

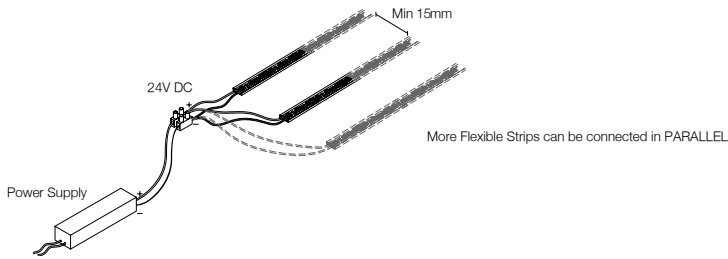

Accessory

[LEDStrip Clip](#)

MX 6355 - L20



LED Driver

Ordering Code	<i>EC LED-24V-120-PH(24)</i>	<i>EC LED-24V-75D-LH(22)</i>
Maximum Driving Power	96W	60W
Matching with LED Fitting	3014 LED Strip	
Output Current	24V DC	24V DC, 1-10V Dimmable
Wiring Box Dimension(mm) (L) x (W) x (H)	350 x 100 x 40	300 x 108 x 60
Cut Hole (mm)	Ø110	Ø124



**IP
65**

LEDStrip Duo


- Easy to bend for flexible design
- Can be shorten by every 25mm
- CRI Typical 82 and 90 options
- 3M adhesive in the Flexible Strip
- Come with mounting clip for IP Flexible Strip
- IP65 water proof silicon sleeve in IP version
- Seperate order of power supply is available
- SDCM Step 3, high color temperature stability

Standard Version

MX 6388 - - **K - 24V - 1000(x3)**

Code	W	Code	CRI	Code	CCT
9.6	9.6W/m	8	80	25	2500K
13.2	13.2W/m	9	90	27	2700K
19.2	19.2W/m			30	3000K
				35	3500K
				40	4000K

- 3000mm, 24V DC, CRI80, 240pcs LEDs/m 19.2W/m, 5498lm
- 3000mm, 24V DC, CRI90, 240pcs LEDs/m 19.2W/m, 4017lm
- *2500K only with CRI80




IP65 Version


MX 6389 - - **K - 24V - 1000(x3)**

Code	W	Code	CRI	Code	CCT
9.6	9.6W/m	8	80	25	2500K
13.2	13.2W/m	9	90	27	2700K
19.2	19.2W/m			30	3000K
				35	3500K
				40	4000K


- 3000mm, 24V DC, CRI80, 240pcs LEDs/m 19.2W/m, 5498lm
- 3000mm, 24V DC, CRI90, 240pcs LEDs/m 19.2W/m, 4017lm
- *2500K only with CRI80



1:1 Scale

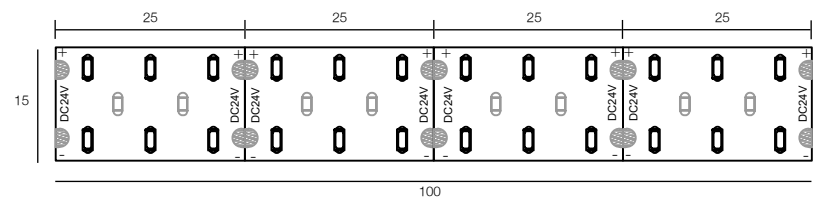


MX 6388

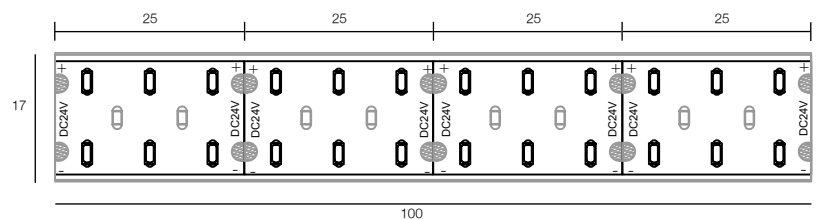

MX 6389 IP65

Connection Detail

Maximum 3 meters in LINEAR CONNECTION

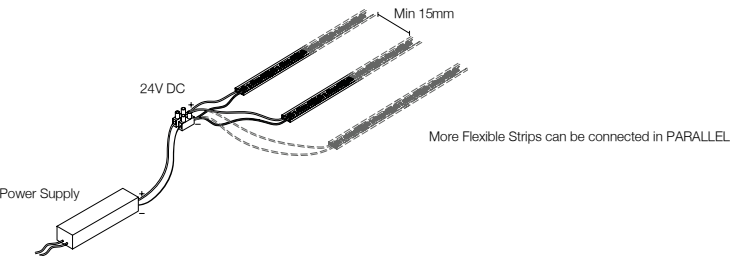

LED Driver

Ordering Code	<i>EC LED-24V-120-PH(24)</i>	<i>EC LED-24V-75D-LH(22)</i>
Maximum Driving Power	96W	60W
Matching with LED Fitting	3014 LED Strip	
Output Current	24V DC	24V DC, 1-10V Dimmable
Wiring Box Dimension(mm) (L) x (W) x (H)	350 x 100 x 40	300 x 108 x 60
Cut Hole (mm)	Ø110	Ø124



2700K - 4000K



IP
65

LEDStrip Dual

- Vary from 2700K to 4000K
- Can be shorten by every 50mm
- CRI Typical 82 and 90 options
- 3M adhesive in the Flexible Strip
- Come with mounting clip for IP Flexible Strip
- IP65 water proof silicon sleeve in IP version
- Seperate order of power supply is available
- SDCM Step 3, high color temperature stability
- CCT Tunable system will provide on request


Standard Version

MX 6363 - 2740K - 12V - 3000

Code	CRI
8	80
9	90

3000mm, 12v DC, CRI80, 60pcs LEDs/m, 3780lm, Max. limitation of strip 13.2W/m

3000mm, 12v DC, CRI90, 60pcs LEDs/m, 2762lm, Max. limitation of strip 13.2W/m





IP65 Version

MX 6364 - 2740K - 12V - 3000



Code	CRI
8	80
9	90

3000mm, 12v DC, CRI80, 60pcs LEDs/m, 3780lm, Max. limitation of strip 13.2W/m


3000mm, 12v DC, CRI90, 60pcs LEDs/m, 2762lm, Max. limitation of strip 13.2W/m

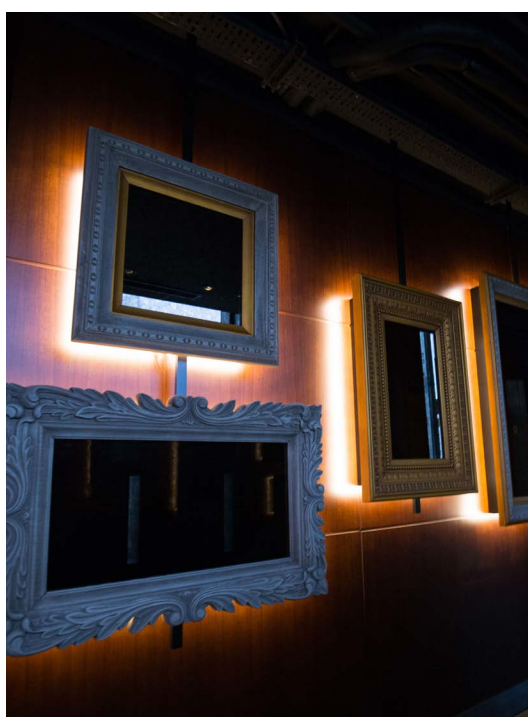

1:1 Scale

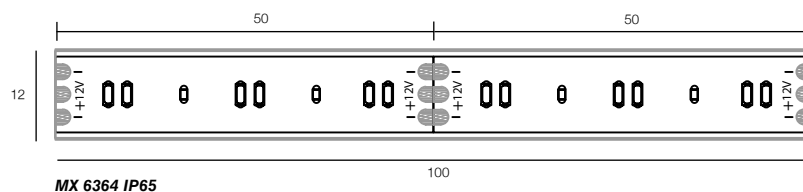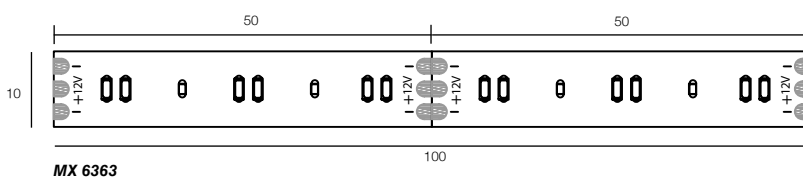


Connection Detail

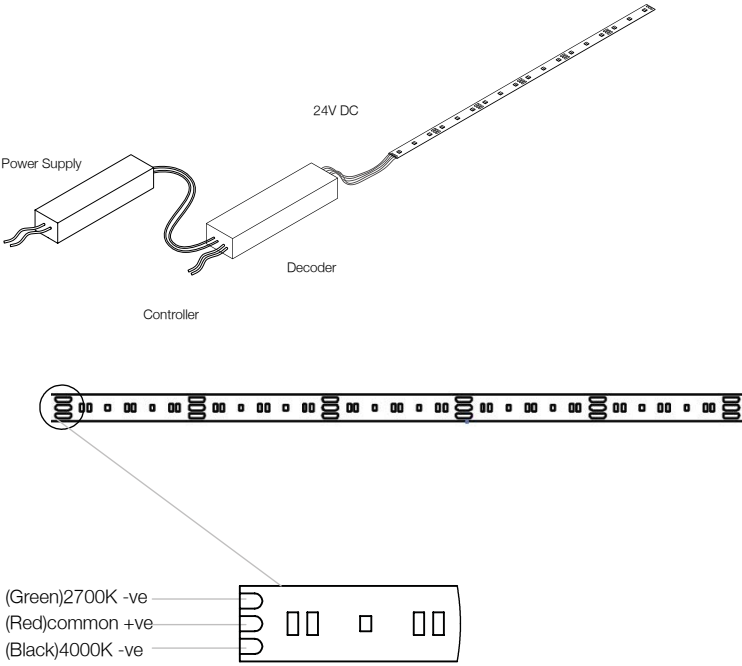

Accessory

LEDStrip Clip

MX 6355 - L20



LED Driver

Ordering Code	EC LED-12V-75-LRS-MW(09)	EC LED-12V-150-LRS-MW(09)
Maximum Driving Power	60W	116W
Matching with LED Fitting	3014 LED Strip	
Output Current	12V DC	
Wiring Box Dimension(mm) (L) x (W) x (H)	230 x 110 x 51	
Cut Hole (mm)	Ø120	

LED Vertical Strip

- Easy to bend for flexible design
- DC 24V vertical LED Strip
- CRI Typical 82
- 3M adhesive in the Flexible Strip
- Can be shorten by every 50mm of 6pcs SMD LED
- IP65 water proof silicon sleeve in IP version
- Seperate order of power supply is available



IP


65

Standard Version

AP - LT 7111 - 9.6 - ☐ ☐ K- 24V - 1000(x3)

Code	CCT
27	2700K
30	3000K
40	4000K

3000mm 24V DC, CRI80, 120pcs LEDs/m, 9.6W/m, 2160lm





IP65 Version


AP - LT 7112 - 9.6 - ☐ ☐ K- 24V - 1000(x3)

Code	CCT
27	2700K
30	3000K
40	4000K


3000mm 24V DC, CRI80, 120pcs LEDs/m, 9.6W/m, 2160lm



1:1 Scale

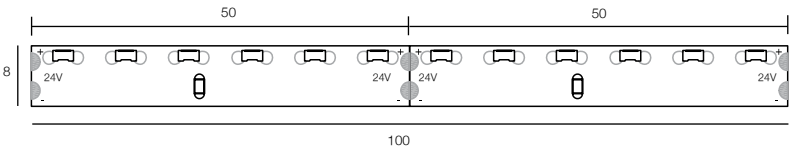


AP-LT7111

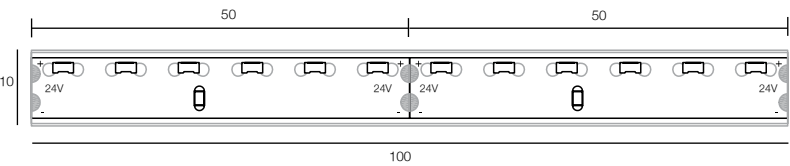

AP-LT7112 IP65

Connection Detail

Maximum 5 meters in LINEAR CONNECTION

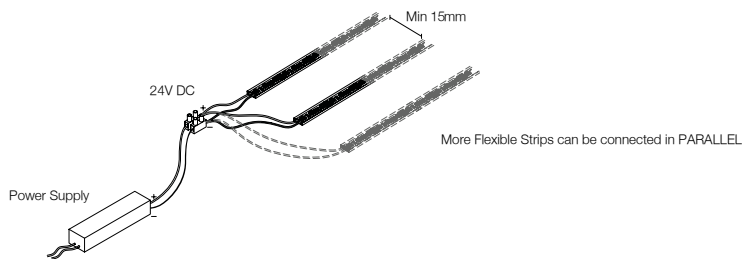

LED Driver

Ordering Code	<i>EC LED-24V-120-PH(24)</i>	<i>EC LED-24V-75D-LH(22)</i>
Maximum Driving Power	96W	60W
Matching with LED Fitting	3014 LED Strip	
Output Current	24V DC	24V DC, 1-10V Dimmable
Wiring Box Dimension(mm) (L) x (W) x (H)	350 x 100 x 40	300 x 108 x 60
Cut Hole (mm)	Ø110	Ø124



IP
65


RGB LED Strip

- Easy to bend for flexible design
- DC 24V 5050 SMD LED Flexible Strip, 14.4W per meter
- High Lumen Output
- 3M adhesive in the Flexible Strip
- IP65 water proof silicon sleeve in IP version
- Seperate order of power supply is available
- SDCM Step 3, high color temperature stability

Standard Version

AP - LT 7115 - 14.4 - RGB - 24V - 1000(x3)


3000mm, 24V DC, CRI80, 60pcs LEDs/m, 14.4W/m





IP65 Version

AP - LT 7116 - 14.4 - RGB - 24V - 1000(x3)


3000mm, 24V DC, CRI80, 60pcs LEDs/m, 14.4W/m



1:1 Scale

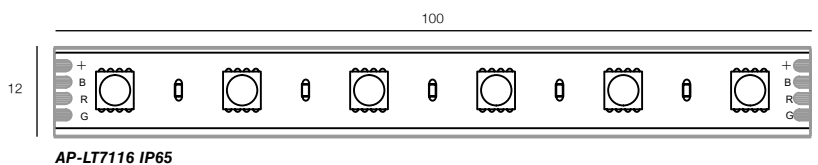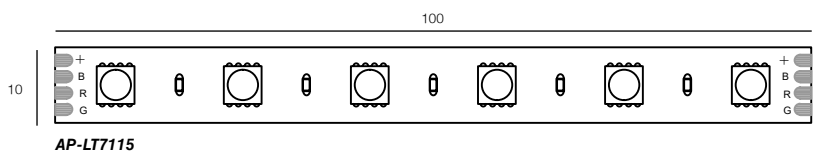


Connection Detail

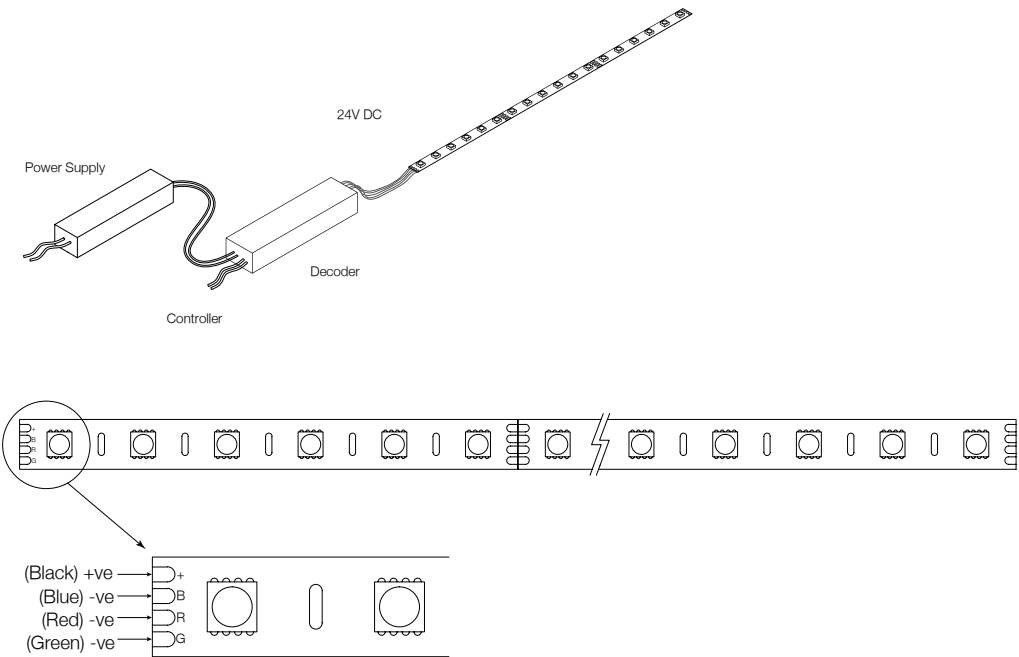

Accessory

LEDStrip Clip

MX 6355 - L20



LED Driver

Ordering Code	EC LED-24V-120-PH(24)
Maximum Driving Power	96W
Matching with LED Fitting	LED Strip
Output Current	24V DC
Wiring Box Dimension(mm) (L) x (W) x (H)	350 x 100 x 40
Cut Hole (mm)	Ø110



IP
65

RGBW LED Strip


- Easy to bend for flexible design
- DC 24V vertical LED Strip
- CRI Typical 82
- 3M adhesive in the Flexible Strip
- Can be shorten by every 100mm of 6pcs SMD LED
- IP65 water proof silicon sleeve in IP version
- Seperate order of power supply is available

Standard Version

AP - LT 7130 - RGBW - K- 24V - 1000(x3)

Code	CCT
27	2700K
30	3000K
40	4000K

3000mm, 24V DC, CRI80, 60pcs LEDs/m, 19.2W/m




IP65 Version



AP - LT 7131 - RGBW - K- 24V - 1000(x3)

Code	CCT
27	2700K
30	3000K
40	4000K


3000mm, 24V DC, CRI80, 60pcs LEDs/m, 19.2W/m



1:1 Scale

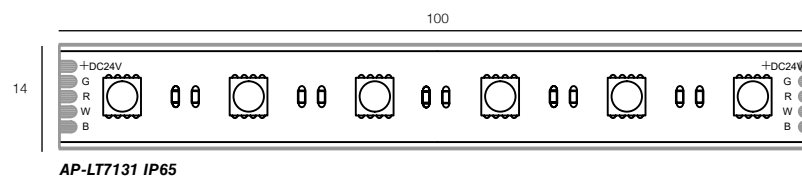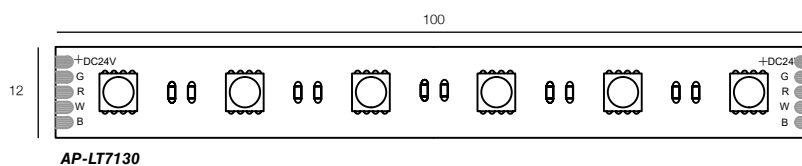

Connection Detail

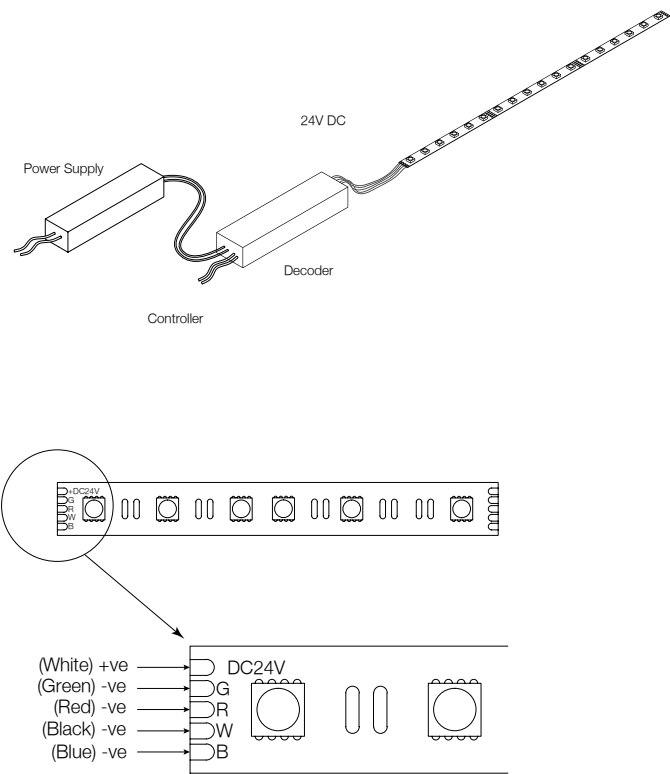

LED Driver

Ordering Code	EC LED-24V-120-PH(24)
Maximum Driving Power	96W
Matching with LED Fitting	LED Strip
Output Current	24V DC
Wiring Box Dimension(mm) (L) x (W) x (H)	350 x 100 x 40
Cut Hole (mm)	Ø110



LEDStrip S Pro


- DC 24V 3014 SMD LED Flexible Strip, 13.2W per meter
- CRI Typical 82 and 90 options
- High Lumen Output
- SDCM 3 Step, high color temperature stability
- Dimmable version available upon request
- RGB version upon request
- Seperate order of power supply is available

MX 6392 - ☐ ☐ ☐ ☐ - **24V** - ☐ ☐ ☐ ☐


Code	CRI	Code	CCT	Code	Length(L)	Output Power
8	80	25	2500K	530	530mm	60 x LED, 6.6W
9	90	27	2700K	1030	1030mm	120 x LED, 13.2W
		30	3000K			
		35	3500K			
		40	4000K			

 24V DC, CRI80, 120pcs LEDs/m, 13.2W/m, 1260lm

 24V DC, CRI90, 120pcs LEDs/m, 13.2W/m, 920lm
*2500K only with CRI80

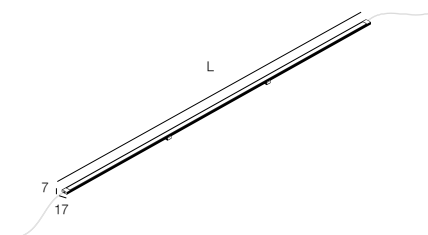


1:1 Scale



Connection Detail

Maximum 5 meters in LINEAR CONNECTION

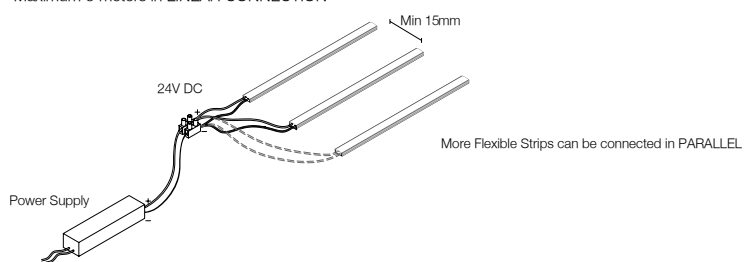

LED Driver

Ordering Code	<i>EC LED-24V-120-PH(24)</i>	<i>EC LED-24V-75D-LH(22)</i>
Maximum Driving Power	96W	60W
Matching with LED Fitting	3014 LED Strip	
Output Current	24V DC	24V DC, 1-10V Dimmable
Wiring Box Dimension(mm) (L) x (W) x (H)	350 x 100 x 40	300 x 108 x 60
Cut Hole (mm)	Ø110	Ø124



LEDStrip Pro

- DC 24V 3014 SMD LED Flexible Strip, 13.2W per meter
- CRI Typical 82 and 90 options
- High Lumen Output
- SDCM 3 Step, high color temperature stability
- Dimmable version available upon request
- RGB version upon request
- Seperate order of power supply is available




MX 6360 - ☐ ☐ ☐ ☐ - **24V** - ☐ ☐ ☐ ☐


Code	CRI	Code	CCT	Code	Length(L)	Output Power
8	80	25	2500K	530	530mm	60 x LED, 6.6W
9	90	27	2700K	1030	1030mm	120 x LED, 13.2W
		30	3000K			
		35	3500K			
		40	4000K			

 24V DC, CRI80, 120pcs LEDs/m, 13.2W/m, 1260lm

 24V DC, CRI90, 120pcs LEDs/m, 13.2W/m, 920lm
*2500K only with CRI80

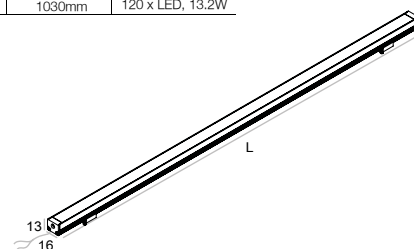


1:1 Scale



Connection Detail

Maximum 5 meters in LINEAR CONNECTION

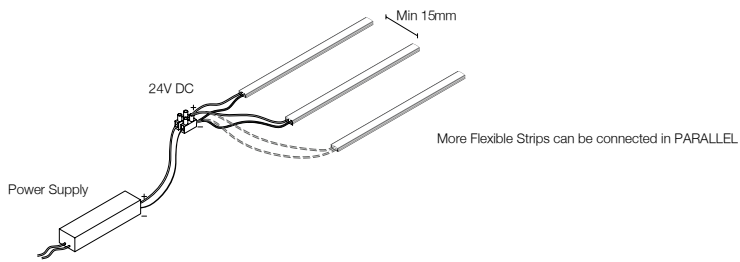

LED Driver

Ordering Code	<i>EC LED-24V-120-PH(24)</i>	<i>EC LED-24V-75D-LH(22)</i>
Maximum Driving Power	96W	60W
Matching with LED Fitting	3014 LED Strip	
Output Current	24V DC	24V DC, 1-10V Dimmable
Wiring Box Dimension(mm) (L) x (W) x (H)	350 x 100 x 40	300 x 108 x 60
Cut Hole (mm)	Ø110	Ø124



LEDStrip L Pro

- DC 24V 3014 SMD LED Flexible Strip, 13.2W per meter
- CRI Typical 82 and 90 options
- High Lumen Output
- SDCM 3 Step, high color temperature stability
- Dimmable version available upon request
- RGB version upon request
- Seperate order of power supply is available

MX 6390 - ☐ ☐ ☐ ☐ - **24V** - ☐ ☐ ☐ ☐


Code	CRI
8	80
9	90

Code	CCT
25	2500K
27	2700K
30	3000K
35	3500K
40	4000K


Code	Length(L)	Output Power
530	530mm	60 x LED, 6.6W
1030	1030mm	120 x LED, 13.2W

 24V DC, CRI80, 120pcs LEDs/m, 13.2W/m, 1260lm

 24V DC, CRI90, 120pcs LEDs/m, 13.2W/m, 920lm
*2500K only with CRI80

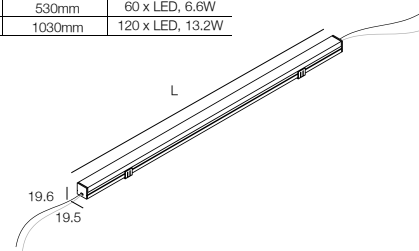


1:1 Scale



Connection Detail

Maximum 5 meters in LINEAR CONNECTION

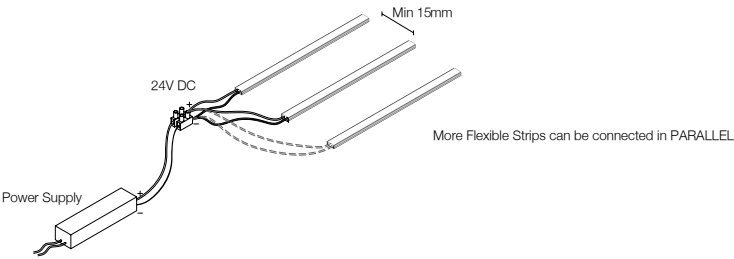

LED Driver

Ordering Code	<i>EC LED-24V-120-PH(24)</i>	<i>EC LED-24V-75D-LH(22)</i>
Maximum Driving Power	96W	60W
Matching with LED Fitting	3014 LED Strip	
Output Current	24V DC	24V DC, 1-10V Dimmable
Wiring Box Dimension(mm) (L) x (W) x (H)	350 x 100 x 40	300 x 108 x 60
Cut Hole (mm)	Ø110	Ø124




LEDStrip Stick

- DC 24V 3014 SMD LED Flexible Strip, 13.2W per meter
- CRI Typical 82 and 90 options
- High Lumen Output
- SDCM 3 Step, high color temperature stability
- Dimmable version available upon request
- RGB version upon request
- Seperate order of power supply is available



MX 6391 - ☐ ☐ ☐ ☐ - **24V** - ☐ ☐ ☐ ☐

Code	CRI	Code	CCT	Code	Length(L)	Output Power
8	80	25	2500K	530	530mm	60 x LED, 6.6W
9	90	27	2700K	1030	1030mm	120 x LED, 13.2W
		30	3000K			
		35	3500K			
		40	4000K			

-  24V DC, CRI80, 120pcs LEDs/m, 13.2W/m, 1260lm
-  24V DC, CRI90, 120pcs LEDs/m, 13.2W/m, 920lm
*2500K only with CRI80

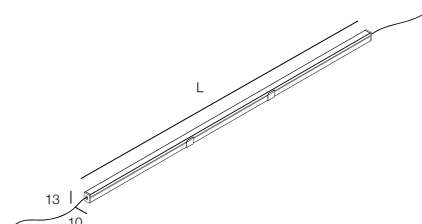


1:1 Scale

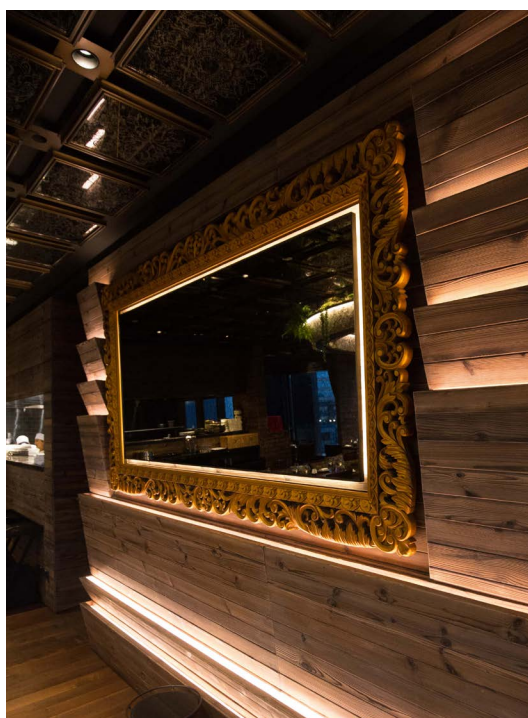

Connection Detail

Maximum 5 meters in LINEAR CONNECTION

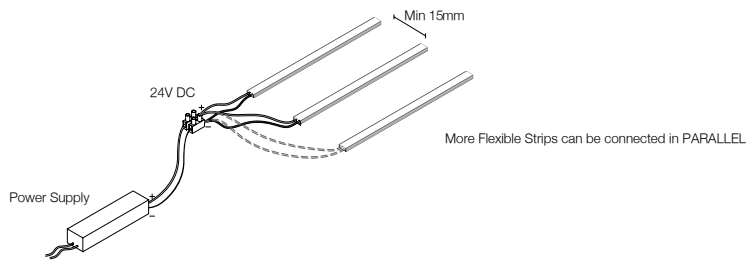

LED Driver

Ordering Code	<i>EC LED-24V-120-PH(24)</i>	<i>EC LED-24V-75D-LH(22)</i>
Maximum Driving Power	96W	60W
Matching with LED Fitting	3014 LED Strip	
Output Current	24V DC	24V DC, 1-10V Dimmable
Wiring Box Dimension(mm) (L) x (W) x (H)	350 x 100 x 40	300 x 108 x 60
Cut Hole (mm)	Ø110	Ø124




LEDStrip Pro Corner

- DC 24V 3014 SMD LED Flexible Strip, 13.2W per meter
- CRI Typical 82 and 90 options
- High Lumen Output
- SDCM 3 Step, high color temperature stability
- Dimmable version available upon request
- RGB version upon request
- Seperate order of power supply is available


MX 6362 - ☐ ☐ ☐ ☐ - **24V** - ☐ ☐ ☐ ☐

Code	CRI	Code	CCT	Code	Length(L)	Output Power
8	80	25	2500K	530	530mm	60 x LED, 6.6W
9	90	27	2700K	1030	1030mm	120 x LED, 13.2W
		30	3000K			
		35	3500K			
		40	4000K			

- 24V DC, CRI80, 120pcs LEDs/m, 13.2W/m, 1260lm
- 24V DC, CRI90, 120pcs LEDs/m, 13.2W/m, 920lm
*2500K only with CRI80

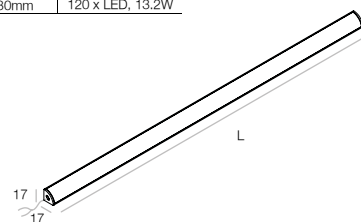


1:1 Scale



Connection Detail

Maximum 5 meters in LINEAR CONNECTION

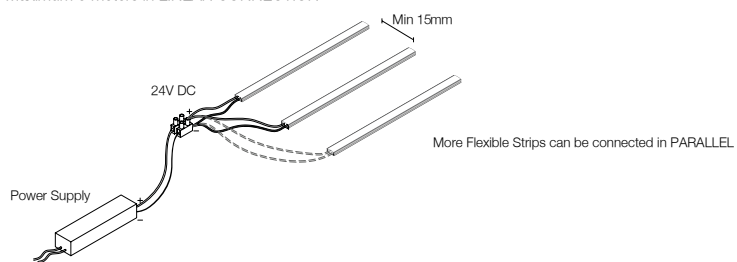

LED Driver

Ordering Code	<i>EC LED-24V-120-PH(24)</i>	<i>EC LED-24V-75D-LH(22)</i>
Maximum Driving Power	96W	60W
Matching with LED Fitting	3014 LED Strip	
Output Current	24V DC	24V DC, 1-10V Dimmable
Wiring Box Dimension(mm) (L) x (W) x (H)	350 x 100 x 40	300 x 108 x 60
Cut Hole (mm)	Ø110	Ø124